



**THE TOWNSHIP OF NIPISSING  
ENTRANCE PERMIT**

724-2144 – OFFICE  
724-2194 – GARAGE  
724-5385 – FAX

**DESCRIPTION AND LOCATION OF PROPERTY:** ROLL NO: \_\_\_\_\_

PROPERTY OF: \_\_\_\_\_ HOME PHONE NO: \_\_\_\_\_  
NAME AND ADDRESS OF OWNER(S)

OWNER(S) SIGNATURE: \_\_\_\_\_ CELL NO: \_\_\_\_\_

LOT NO.	CONCESSION OR PLAN NO.	<b>TOWNSHIP OF NIPISSING</b>	Date:
_____	_____	_____	_____
ON THE _____	SIDE OF HIGHWAY _____	ABOUT _____	MILES
(NORTH, SOUTH ETC.)	(NO. OR NAME)	OF _____	
(NORTH, EAST, SOUTH, WEST)		(CITY, TOWN OR VILLAGE)	

**CLASSIFICATION, USE, PURPOSE AND DETAIL OF ENTRANCE:**

ACCESS REQUIRED FOR: \_\_\_\_\_  
(DETAILED DESCRIPTION OF TYPE OF ESTABLISHMENT SERVED BY ENTRANCE)

NO. OF ENTRANCES \_\_\_\_\_ WIDTH OF ENTRANCE(S) \_\_\_\_\_ FEET

MATERIAL PROPOSED FOR USE: \_\_\_\_\_

LENGTH OF CULVERT \_\_\_\_\_ SIZE OF CULVERT: \_\_\_\_\_

APPROXIMATE DISTANCE APPROACHING TRAFFIC IS VISIBLE FROM THE POINT OF ENTRANCE TO  
THE HIGHWAY – FROM THE RIGHT: \_\_\_\_\_ FEET – FROM THE LEFT: \_\_\_\_\_

INDICATE WHICH, IF ANY, OF THE FOLLOWING WILL BE AFFECTED:

HIGHWAY DRAINAGE     TREES, SHRUBS, PLANTING     SIGNS     GUARD RAIL     NIL

**ROAD SUPERINTENDENT**


ACTION ON APPLICATION: DATE: \_\_\_\_\_

APPROVED     NOT APPROVED     REFERRED TO COUNCIL \_\_\_\_\_  
SIGNATURE OF OPERATIONS SUPERINTENDANT


ACTION UPON COMPLETION

APPROVED     NOT APPROVED    DATE \_\_\_\_\_

SIGNATURE OF OPERATIONS SUPERINTENDENT: \_\_\_\_\_



## CULVERT INSTALLATION

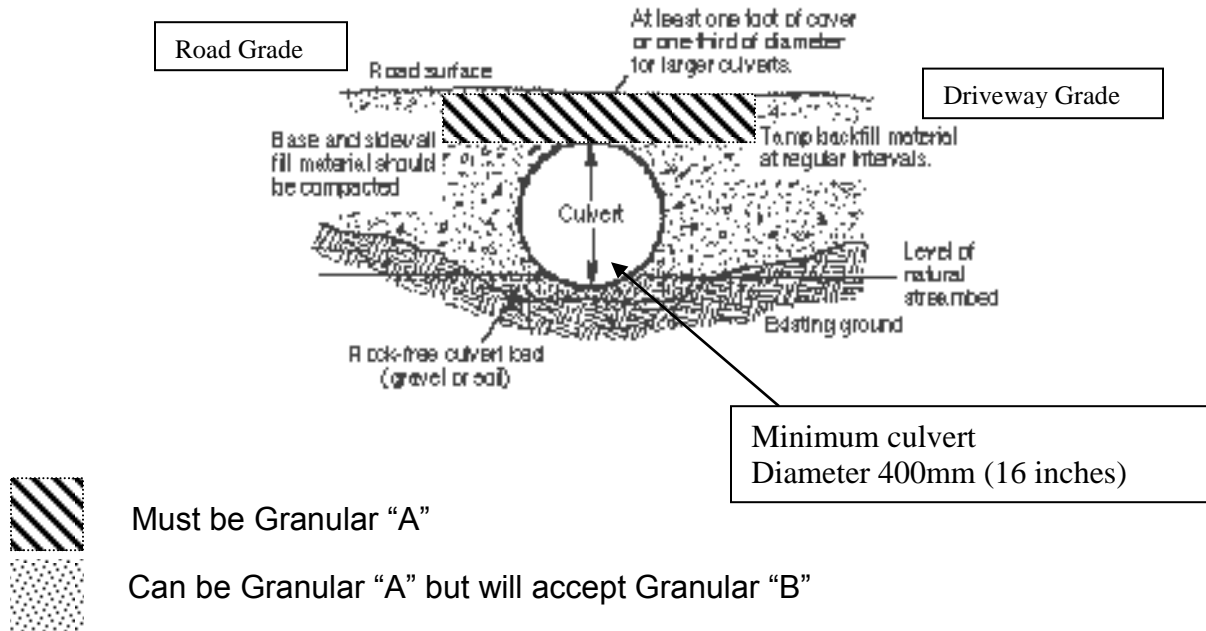

1. Must be minimum of 300mm all around pipe including underneath in order to prevent frost action.
2. Minimum of 150mm (6 inches) granular "A" above pipe.
3. NO cement is allowed at the ends of culverts. The culvert must be exposed a minimum of 300mm (1 foot) at both ends.
4. Driveways must slope centre line of ditch and not be higher than grade of road where they meet as this will result in damage to driveway during grading operations. Municipality will NOT assume responsibility for damage caused as a result of this.
5. All new or altered entrances must have signed installations acceptance before acceptance will be issued by the Municipality.
6. All lengthening of existing culverts must be installed at same standards as a new entrance.
7. All driveways that will be paved must also have municipal approval before any paving occurs.
8. Secondary driveways must have a minimum distance of separation of 8 meters (26 feet).